

THE NARROWEST SOLAR STREET LIGHT



MAXIMUM PERFORMANCE.
MINIMAL FOOTPRINT.



SOLAR
POWERED



SUPER
BRIGHT LED



LONG LIFE
BATTERY



DURABLE
DESIGN



WEATHER
RESISTANT

PRODUCT MODEL

AIOSSL27

SLIM DESIGN.
POWERFUL SOLUTION.



NARROWEST
DESIGN



MAXIMUM
PERFORMANCE



ECO-FRIENDLY
SOLUTION



EASY
INSTALLATION



OHMTEK SIBER

LARGE SMART CAPACITY LITHIUM BATTERY

- ✓ Green
- ✓ High & low temperature adaptability
- ✓ Long Lasting
- ✓ High energy storage density



SOLAR POWER TECHNOLOGY

- ✓ Using high-quality poly silicon solar panel
- ✓ High photoelectric conversion
- ✓ Fast charging speed
- ✓ About 6 hours to full charge








AIOSSL27 Slim Solar LED Lighting



AIOSSL27-30 Slim Solar LED Lighting








Product Code	AIOSSL27
Power	30w
Led	Lumiled
CCT	3000K, 4000K
CRI	>70
Lumen	150lm/w
Beam angle	Types: I, II, III,V,IV
Operating Time (Full power)	>12h
Operating Time (Intelligent mode)	2-3 Rainy days
Detection Microwave sensor distance	8-10m'
Mono Crystalline Silicon Solar Panel	15w/6v
Battaries Litum-ion Li	12Ah
Working Temperature Condition	-10deg to +60deg
Humidity of Working Condition	10%-90% RH
Warranty	2-3years
Protection Grade	IP66 IK08
Installation Arm diameter	Ø76mm.
Installation Height	3m-4m
Net Weight	4.5kg.
Gross Weight	5kg.
Product size	492x200x54.95

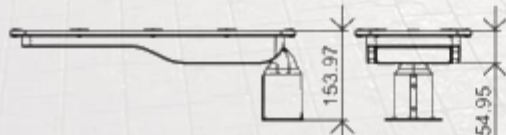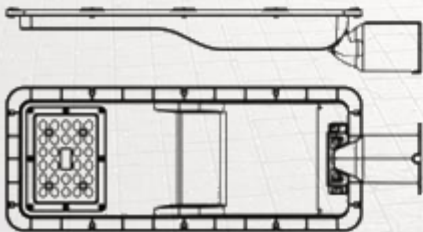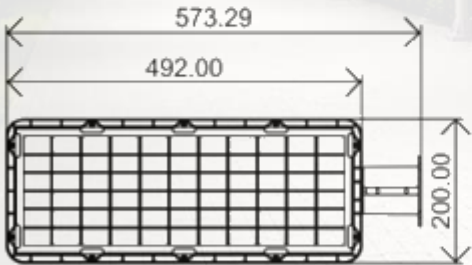



AIOSSL27-60 Slim Solar LED Lighting

Product Code	AIOSSL27-60
Power	60w
Led	Lumiled
CCT	3000K, 4000K
CRI	>70
Lumen	150lm/w
Beam angle	Types: I, II, III,V,IV
Operating Time (Full power)	>12h
Operating Time (Intelligent mode)	2-3 Rainy days
Detection Microwave sensor distance	8-10m'
Mono Crystalline Silicon Solar Panel	20w/6v
Battaries Litum-ion Li	24Ah
Working Temperature Condition	-10deg to +60deg
Humidity of Working Condition	10%-90% RH
Warranty	2-3years
Protection Grade	IP66 IK08
Installation Arm diameter	Ø76mm.
Installation Height	5m-6m
Net Weight	6kg.
Gross Weight	7kg.
Product size	645x200x54.95

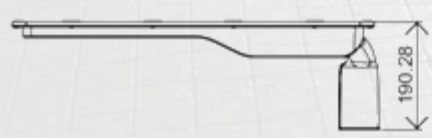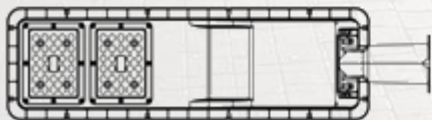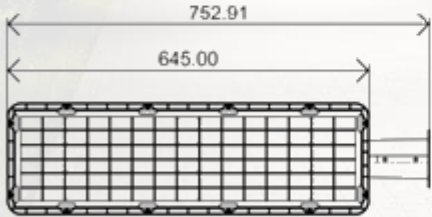



AIOSSL27-90 Slim Solar LED Lighting

Product Code	AIOSSL27-90
Power	90w
Led	Lumiled
CCT	3000K, 4000K
CRI	>70
Lumen	150lm/w
Beam angle	Types: I, II, III,V,IV
Operating Time (Full power)	>12h
Operating Time (Intelligent mode)	2-3 Rainy days
Detection Microwave sensor distance	8-10m'
Mono Crystalline Silicon Solar Panel	30w/6v
Battaries Litum-ion Li	30Ah
Working Temperature Condition	-10deg to +60deg
Humidity of Working Condition	10%-90% RH
Warranty	2-3years
Protection Grade	IP66 IK08
Installation Arm diameter	Ø76mm.
Installation Height	3m-4m
Net Weight	7g.
Gross Weight	7.5kg.
Product size	948x200x54.95

